


SRS CRISAFULLI INC.
 1610 Crisafulli Drive
 P.O. Box 1051
 Glendive, MT 59330-1051 USA
 Phone: 1-406-365-3393
 Toll-free: 1-800-442-7867
 Fax: 1-406-365-8088

**SUBMERSIBLE ELECTRIC PUMPS
 (1150 RPM)
 S SERIES**

SRS Crisafulli Submersible Electric Pumps are American made, direct driven, centrifugal pumps. The pumps are manufactured with an ASTM A36 mild carbon steel (BN 150 hardness) pump volute and impeller, dual carbon/ceramic shaft seals, UL listed, totally enclosed, air filled, non-ventilated, explosion-proof electric motor, (Class 1, Groups C & D, hazardous locations), moisture detection probes, thermal overload protection, 25 feet of power and control cable (additional length available) and gray epoxy paint. All pumps with motors larger than 5 horsepower are 460 volt, 3 phase only. (Consult factory for motor sizes smaller than 5 HP, and for other special voltages.)

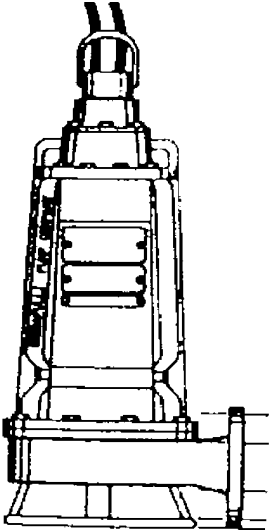


PUMP SIZE	MODEL NUMBER	HP	EST. WT (LBS.)
4"	SE042S-005-6	5	260
4"	SE042S-007-6	7.5	375
4"	SE042S-010-6	10	375

Options & Accessories	
Pump Case & Impeller of AR Steel BN 400 Hardness	Consult Factory
Pump Case & Impeller of 316 Stainless Steel	Consult Factory
Electrical Control Panels	See Section 6
Mercury Float Switches	See Section 6
Tungsten Carbide Seals	See Section 6
Additional Cable	Consult Factory

SRS CRISAFULLI INC.

1610 Crisafulli Drive
P.O. Box 1051
Glendive, MT 59330-1051 USA
Phone: 1-406-365-3393
Toll-free: 1-800-442-7867
Fax: 1-406-365-8088



**SUBMERSIBLE ELECTRIC PUMPS (1750 RPM)
S SERIES**

SRS Crisafulli Submersible Electric Pumps are American made, direct driven, centrifugal pumps. The pumps are manufactured with an ASTM A36 mild carbon steel (BN 150 hardness) pump volute and impeller, dual carbon/ceramic shaft seals, UL listed, totally enclosed, air filled, non-ventilated, explosion-proof electric motor, (Class 1, Groups C & D, hazardous locations), moisture detection probes, thermal overload protection, 25 feet of power and control cable (additional length available) and gray epoxy paint. All pumps with motors larger than 5 horsepower are 460 volt, 3 phase only. (Consult factory for motor sizes smaller than 5 HP, and for other special voltages.)


PUMP SIZE	MODEL NUMBER	HP	EST. WT (LBS.)
2"	SE022S-015-4	1.5	185
2"	SE022S-002-4	2	185
2"	SE022S-003-4	3	185
2"	SE022S-005-4	5	220
2.5"	SE252S-003-4	3	200
2.5"	SE252S-005-4	5	240
2.5"	SE252S-007-4	7.5	240
2.5"	SE252S-010-4	10	375
3"	SE032S-005-4	5	255
3"	SE032S-007-4	7.5	255
3"	SE032S-010-4	10	390
3"	SE032S-015-4	15	390
3"	SE032S-020-4	20	390
3"	SE032S-025-4	25	500
3"	SE032S-030-4	30	500
3"	SE032S-040-4	40	500
4"	SE042S-007-4	7.5	260
4"	SE042S-010-4	10	395
4"	SE042S-015-4	15	395
4"	SE042S-020-4	20	395
4"	SE042S-025-4	25	505
4"	SE042S-030-4	30	505
4"	SE042S-040-4	40	505
4"	SE042S-050-4	50	1,210
4"	SE042S-060-4	60	1,210
4"	SE042S-075-4	75	1,210
4"	SE042S-100-4	100	1,560

Options & Accessories for Submersible Electric Pumps are listed on Pages 3-1 & 3-3

SRS CRISAFULLI INC.
 1610 Crisafulli Drive
 P.O. Box 1051
 Glendive, MT 59330-1051 USA
 Phone: 1-406-365-3393
 Toll-free:1-800-442-7867
 Fax:1-406-365-8088

**SUBMERSIBLE ELECTRIC PUMPS
 (3450 RPM)
 S SERIES**

SRS Crisafulli Submersible Electric Pumps are American made, direct driven, centrifugal pumps. The pumps are manufactured with an ASTM A36 mild carbon steel (BN 150 hardness) pump volute and impeller, dual carbon/ceramic shaft seals, UL listed, totally enclosed, air filled, non-ventilated, explosion-proof electric motor, (Class 1, Groups C & D, hazardous locations), moisture detection probes, thermal overload protection, 25 feet of power and control cable (additional length available) and gray epoxy paint. All pumps with motors larger than 5 horsepower are 460 volt, 3 phase only. (Consult factory for motor sizes smaller than 5 HP, and for other special voltages.)

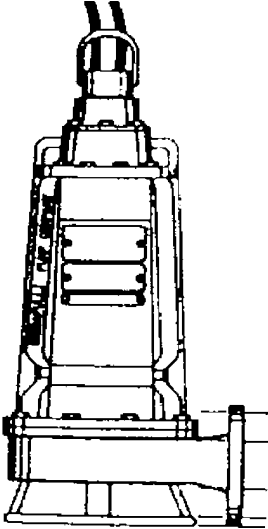


PUMP SIZE	MODEL NUMBER	HP	EST. WT (LBS.)
2"	SE022SHP-005-2	5	220
2"	SE022SHP-007-2	7.5	220
2"	SE022SHP-010-2	10	355
2"	SE022SHP-015-2	15	355
2.5"	SE252SHP-015-2	15	360
2.5"	SE252SHP-020-2	20	360
2.5"	SE252SHP-025-2	25	470
2.5"	SE252SHP-030-2	30	470

Options & Accessories	
Case & Impeller from AR Steel BN 400 Hardness	Consult Factory
Case & Impeller from 316 Stainless Steel	Consult Factory
Electrical Control Panels	See Section 6
Mercury Float Switches	See Section 6
Tungsten Carbide Seals	See Section 6
Additional Cable	Consult Factory

SRS CRISAFULLI INC.
 1610 Crisafulli Drive
 P.O. Box 1051
 Glendive, MT 59330-1051 USA
 Phone: 1-406-365-3393
 Toll-free: 1-800-442-7867
 Fax: 1-406-365-8088

**SUBMERSIBLE ELECTRIC PUMPS
 (1150 RPM)
 J SERIES**

SRS Crisafulli Submersible Electric Pumps are American made, direct driven, centrifugal pumps. The pumps are manufactured with an ASTM A36 mild carbon steel (BN 150 hardness) pump volute and impeller, dual carbon/ceramic shaft seals, UL listed, totally enclosed, air filled, non-ventilated, explosion-proof electric motor, (Class 1, Groups C & D, hazardous locations), moisture detection probes, thermal overload protection, 25 feet of power and control cable (additional length available) and gray epoxy paint. All pumps with motors larger than 5 horsepower are 460 volt, 3 phase only. (Consult factory for motor sizes smaller than 5 HP, and for other special voltages.)

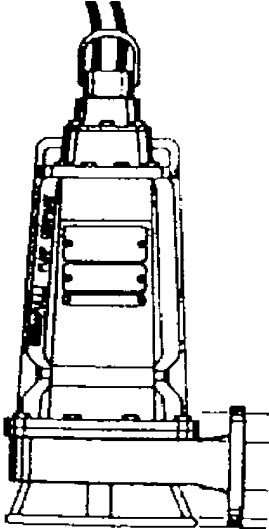


PUMP SIZE	MODEL NUMBER	HP	EST. WT. (LBS.)
2"	SE029S-002-6	2	190
2"	SE029S-003-6	3	230
2"	SE029S-005-6	5	230
2.5"	SE259S-003-6	3	245
2.5"	SE259S-005-6	5	245
2.5"	SE259S-007-6	7.5	360
3"	SE039S-005-6	5	300
3"	SE039S-007-6	7.5	415
3"	SE039S-010-6	10	415
3"	SE039S-015-6	15	850
4"	SE049S-007-6	7.5	455
4"	SE049S-010-6	10	890
4"	SE049S-015-6	15	890
4"	SE049S-020-6	20	890
4"	SE049S-025-6	25	890
4"	SE049S-030-6	30	1,290
6"	SE069S-060-6	60	1,350
6"	SE069S-075-6	75	1,700
6"	SE069S-100-6	100	1,700

Options & Accessories for Submersible Electric Pumps are listed on Pages 3-1 & 3-3

SRS CRISAFULLI INC.
 1610 Crisafulli Drive
 P.O. Box 1051
 Glendive, MT 59330-1051 USA
 Phone: 1-406-365-3393
 Toll-free: 1-800-442-7867
 Fax: 1-406-365-8088

**SUBMERSIBLE ELECTRIC PUMPS
 (1750 RPM)
 J SERIES**

SRS Crisafulli Submersible Electric Pumps are American made, direct driven, centrifugal pumps. The pumps are manufactured with an ASTM A36 mild carbon steel (BN 150 hardness) pump volute and impeller, dual carbon/ceramic shaft seals, UL listed, totally enclosed, air filled, non-ventilated, explosion-proof electric motor, (Class 1, Groups C & D, hazardous locations), moisture detection probes, thermal overload protection, 25 feet of power and control cable (additional length available) and gray epoxy paint. All pumps with motors larger than 5 horsepower are 460 volt, 3 phase only. (Consult factory for motor sizes smaller than 5 HP, and for other special voltages.)

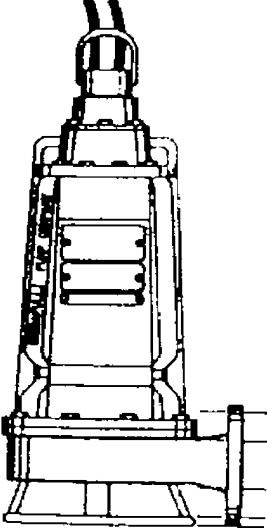

PUMP SIZE	MODEL NUMBER	HP	EST. WT (LBS.)
2"	SE029S-005-4	5	230
2"	SE029S-007-4	7.5	230
2"	SE029S-010-4	10	365
2"	SE029S-015-4	15	365
2.5"	SE259S-007-4	7.5	245
2.5"	SE259S-010-4	10	380
2.5"	SE259S-015-4	15	380
2.5"	SE259S-020-4	20	380
3"	SE039S-015-4	15	435
3"	SE039S-020-4	20	435
3"	SE039S-025-4	25	545
3"	SE039S-030-4	30	545
3"	SE039S-040-4	40	545
4"	SE049S-025-4	25	590
4"	SE049S-030-4	30	590
4"	SE049S-040-4	40	590
4"	SE049S-050-4	50	1,285
4"	SE049S-060-4	60	1,285
4"	SE049S-075-4	75	1,285
4"	SE049S-100-4	100	1,635

Options & Accessories for Submersible Electric Pumps are listed on Pages 3-1 & 3-3